


## PREPARING FOR INSTALLATION

Carefully remove all contents from the carton. Shut off the power at the circuit breaker and completely remove the old fixture from the ceiling, including the old mounting bracket. Remove the new mounting bracket assembly from the bag. Then remove cap nuts (L) from mounting screws (E). Place the mounting plate (D) over the junction box so that mounting screws (E) extend out away from the ceiling. Pull the house wires through the center of mounting plate (D). Put the drywall anchor (A) inside the hole in the ceiling, then insert the drywall screw (B) through the mounting plate (D) into the drywall anchor (A). Secure mounting plate (D) to the junction box by tightening the screws (F).

## ASSEMBLING THE FIXTURE

Thread wires through and screw the hanging ring (M) onto the threaded post (N) of the fixture for each side. By measuring, determine the correct number of chain links needed for proper hanging height. If necessary, use a pair of pliers to open and remove any excess chain. Attach one quick-connect link (J) to each end of chain (K). Use one quick-connect link (J) to attach chain (K) to hanging ring (M) and securely close. Feed the fixture wires up through the chain (every three links or so), pulling the wires until taut. Use the remaining quick-connect link (J) to attach chain (K) to canopy loop (I). To shorten the fixture, trim the wires to desired length. Leave at least 8 to 10 inches of wire in addition to the desired length. Pull the fixture wires through the top of the canopy (H). Secure the screw collar loop (C) into mounting plate (D). Hide wirerope inside the canopy (H).

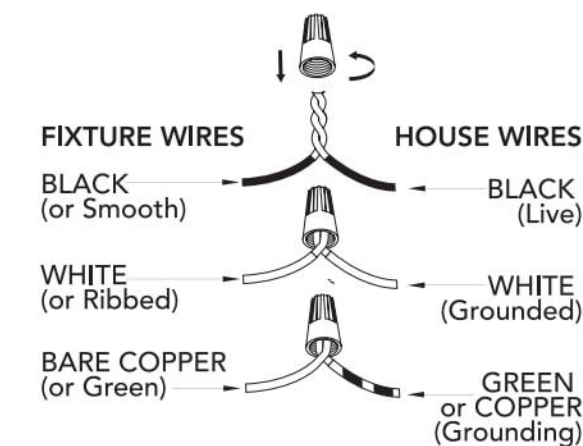

## CONNECTING THE WIRES

Have a helper support the fixture's weight while completing the wiring. Attach the fixture's wires to the power supply wires from the junction box. Connect black to black (live); white to white (neutral); grounding to grounding (green or copper). Twist the ends of the wire pairs together. Then twist on a wire connector. Make sure all twists are in the same direction. Loop fixture's ground wire around grounding screw (G) and tighten. If there is no ground wire (green or copper) from the junction box, contact a qualified electrician.

## FINISHING THE INSTALLATION

Raise canopy (H) to mounting plate (D) and position mounting screws (E) so that they protrude through the openings of canopy (H). Secure canopy (H) in place with cap nuts (L). Slide candle sleeves (O) onto sockets (P). Install light bulb (not included) in accordance with the fixture's specifications. Do not exceed the recommended wattage. Turn on the power and test the fixture. Your installation is now complete.

## CLEANING TIPS

Treat the fixture gently! Regular cleaning will reduce the need for deep cleaning. For regular cleaning, turn off the light and wipe down the fixture with a clean lint-free cotton or microfiber cloth. Never spray cleaner directly onto the fixture.

### Hunter Pro Tip:

Let the tool do the work! Use chain pliers to easily open and close chain links to shorten your fixture.




### NOTICE

Drill 9/64" pilot holes in support structure to aid in securing light fixture.

# Hunter

## Fair Oaks

For Models:  
Para los Modelos:  
Pour les Modèles:  
**13099**  
**13100**

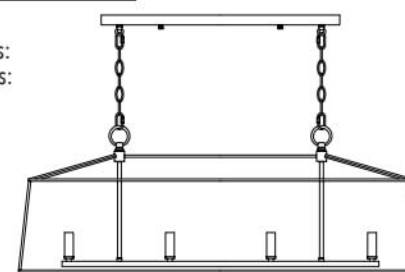

Here are the tools you'll need to complete your installation:  
Estas son las herramientas que usted necesitará para completar su instalación:  
Voici les outils dont vous aurez besoin pour réaliser l'installation:

Hardware Service Kit/Kit De Mantenimiento Del Equipo/Trousse De Maintenance Quincaillerie

4 Light Linear Chandelier  
4 Luz Lámpara Lineal  
4 Lumière Chandelier Linéaire


Fixture weight ±2 lbs:  
Peso ±2 lb: 12.58 lbs (5.71 kg)  
Poids fixe ±2 lbs:

Hardware Service Kit/Kit De Mantenimiento Del Equipo/Trousse De Maintenance Quincaillerie


Part #/Pieza #/Pièce #	Model/Modelo/Modèle	Finish/Finish/Fini
KG20601895	13099	Flat Matte Black/Negro Mate Plano/Noir Mat Dépoli
KG20601A57	13100	Luxe Gold/Oro de Lujol/Or Grand Luxe




Ladder  
Escalera  
Échelle



Screwdriver  
Destornilladore  
Tournevis




Pliers  
Alicates  
Pince



Wire Strippers  
Pelacables  
Pince à dénuder



Drill  
Taladro  
Foret

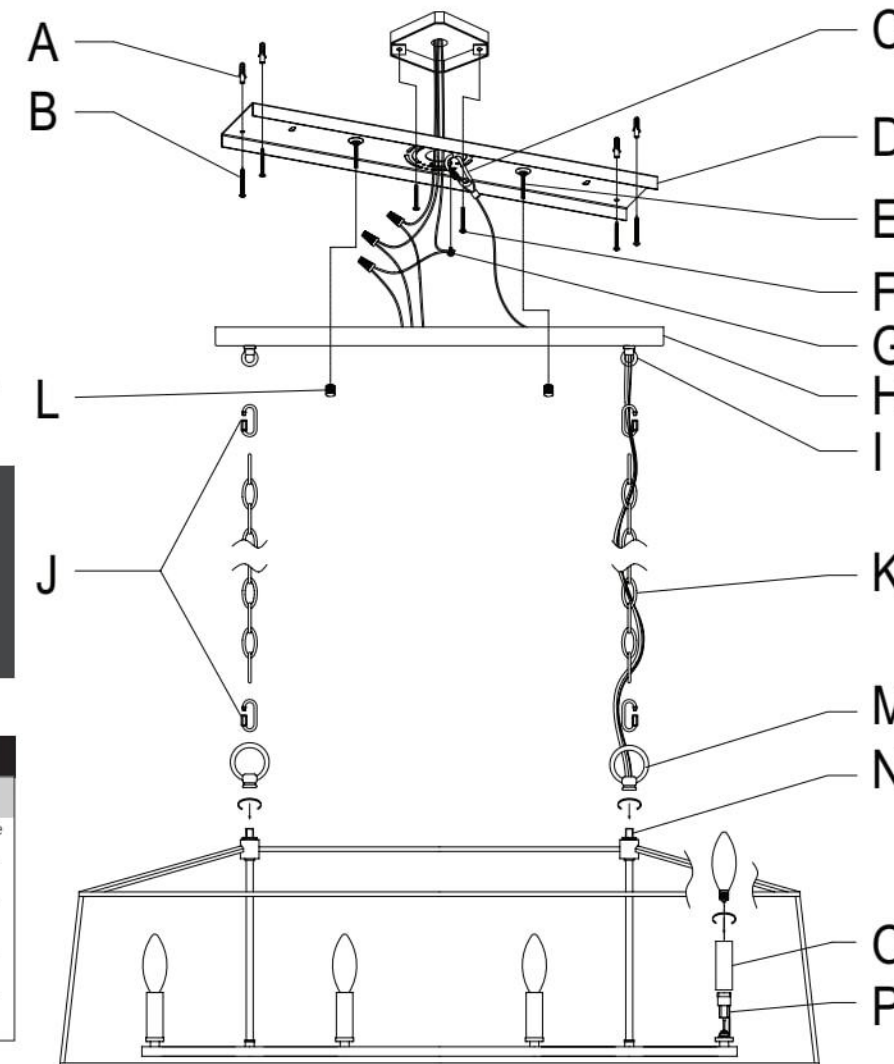

## INSTALLATION INSTRUCTIONS INSTRUCCIONES DE INSTALACIÓN/ INSTRUCTIONS D'INSTALLATION

**WARNING**

- To avoid possible electrical shock, before installing your light fixture, disconnect the power by turning off the circuit breakers to the outlet box associated with the wall switch location.
- The lighting fixture must be grounded. If the ground wire for the installation site is not present, immediately **STOP** installation and consult a qualified electrician.
- All wiring must be in accordance with national and local electrical codes ANSI/NFPA 70. If you are unfamiliar with wiring or in doubt, consult a qualified electrician.

**READ AND SAVE THESE INSTRUCTIONS**  
These instructions are provided for your safety. It is very important that they are read carefully and completely before beginning installation of the lighting fixture.

**ADVERTENCIA**

- Para evitar una posible descarga eléctrica, antes de instalar su lámpara, desconecte la energía apagando los interruptores automáticos (breakers) que alimentan la caja de salida asociada con la ubicación del interruptor de pared.
- La lámpara se debe conectar a tierra. Si el alambre de conexión a tierra no está presente en el sitio de la instalación, **DETENGA** inmediatamente la instalación y consulte con un electricista calificado.
- Todo el cableado debe realizarse de acuerdo con los códigos eléctricos locales y nacionales ANSI/NFPA 70. Si no está familiarizado con el cableado, o si tiene duda, consulte a un electricista calificado.

**LEA Y GUARDE ESTAS INSTRUCCIONES**  
Estas instrucciones se proporcionan para su seguridad. Es muy importante leerlas detenidamente y completamente antes de comenzar la instalación de la lámpara.

**AVERTISSEMENT**

- Pour éviter tout choc électrique, avant d'installer le luminaire, coupez le courant en éteignant les disjoncteurs de la boîte électrique associée à l'interrupteur mural.
- Le luminaire doit être mis à la terre. Si le fil de terre du lieu d'installation n'est pas présent, **ARRÊTER** immédiatement l'installation et consulter un électricien qualifié.
- Tout le câblage doit être conforme aux codes électriques nationaux et locaux en vigueur et à la norme ANSI/NFPA 70. Si vous n'avez pas l'habitude de faire ce câblage ou en cas de doute, adressez-vous à un électricien qualifié.

**LISEZ ET CONSERVEZ CES INSTRUCTIONS**  
Ces instructions sont fournies pour votre sécurité. Il est très important de les lire attentivement dans leur intégralité avant d'entreprendre l'installation du luminaire.