


AIRFOIL DIAMETER	5ft (1.5m)	6ft (1.8m)	7ft (2.1m)	8ft (2.4m)
Airfoil Material	6061-T6 Aircraft Grade Aluminum			
Number of Airfoils	4			
Airfoil Finish Colors	Matte Black, Fresh White, Matte Silver			



PERFORMANCE	5ft (1.5m)	6ft (1.8m)	7ft (2.1m)	8ft (2.4m)
Max Speed (RPM)	194	161	143	143
Recommended Spacing	20ft (6.10m)	24ft (7.32m)	28ft (8.53m)	30ft (9.14m)
Max Affected Area	400ft ² (37.16m ²)	576ft ² (53.5m ²)	784ft ² (72.8m ²)	1024ft ² (95.1m ²)
Max Sound Level (dBA)	51	47	54	54
Air Volume	11,437 CFM (5.398CMS)	16,540 CFM (7.806 CMS)	18,391 CFM (8.680 CMS)	24,466 CFM (11.547 CMS)

HANGING REQUIREMENTS	5ft (1.5m)	6ft (1.8m)	7ft (2.1m)	8ft (2.4m)
Hanging Weight	48lbs (21.8kg)	48.5lbs (22.0kg)	49lbs (22.2kg)	49.5lbs (22.5kg)

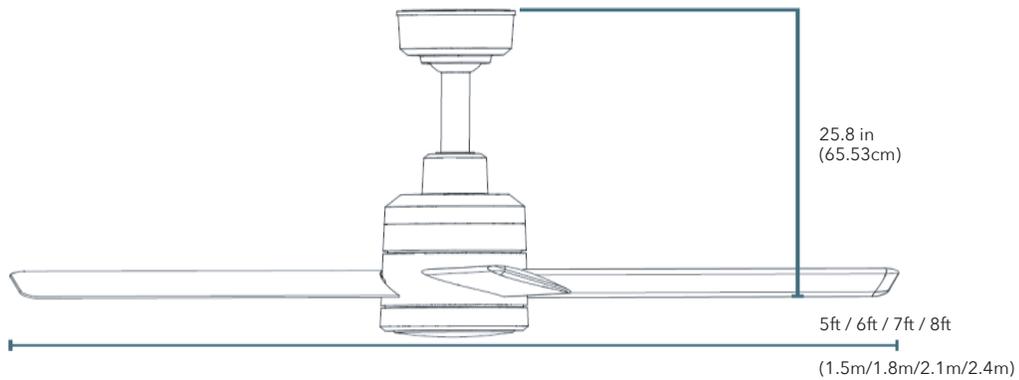

MOTOR	5ft (1.5m)	6ft (1.8m)	7ft (2.1m)	8ft (2.4m)
Motor Type	Reversible, 8-Speed DC Motor			
Max Power (W)	68	73	74	102

MAX AMP DRAW	5ft (1.5m)	6ft (1.8m)	7ft (2.1m)	8ft (2.4m)
120V Single Phase (A)	0.57	0.61	0.62	0.85
240V Single Phase (A)	0.31	0.33	0.34	0.46

POWER AND CONTROLS

Power Source	AC 1PH 100-120V 50-60HZ, AC 1PH 200-240V 50-60HZ
Wall Control Options	RF Remote Control, Basic Wall Control, 3in. (7.6cm) Touchscreen Wall Control, or 4in.(10.2cm) Touchscreen Wall Control
Building Management Compatible	BACNet Gateway

INSTALLATION

Mounting Options	Standard/Angled
Downrod Length	11in. (27.94cm) Standard Downrod Optional downrod sizes: 23in. (58.42cm), 35in. (88.9cm), 47in. (119.38cm), 59in. (149.86cm)
Motor Wiring	Pre-wired motor cables, pre-assembled downrod

LED Light Kit

Color Temperature (K)	3,000
Flux (Lm)	2,600
Min Luminous Efficiency (Lm/W)	80
Max Input Power (W)	30
Max Input Current	120V Single Phase (A) = 0.25 240V Single Phase (A) = 0.13

RATING AND COMPLIANCE

---	UL 507 Wet Rated
Certifications	ETL/Intertek- certified to ANSI/UL 507 and CSA C22.2 No. 60335-1 and 60335-2-80 in North America
Safety Features	International Low Voltage Directive: 2014/35/EU. IEC / EMC / CE
Warranty	5-Year Warranty (All Components)

REV020526SR