


PREPARING FOR INSTALLATION

Carefully remove all contents from the carton. Shut off the power at the circuit breaker and completely remove the old fixture from the ceiling, including the old mounting bracket. Remove the new mounting bracket assembly from the bag. One end of the threaded post (H) should be attached to the mounting bracket (A) with a hex nut (G) in place. The other end should have the canopy loop (E) attached. Unscrew the canopy loop ring (F) from the canopy loop (E). Depending on the placement of your junction box the position of threaded post (H) may need to be adjusted to allow the canopy to be flush with the ceiling. Determine this by lifting mounting bracket (A) up to the junction box and place canopy (D) over the canopy loop (E), so that it is flush with the ceiling. Adjust the position of threaded post (H) on the mounting bracket (A) so that the canopy (D) covers at least half of the exterior threads on the canopy loop (E) while it is securely connected to threaded post (H). The threaded post (H) can be adjusted by loosening hex nut (G) to allow movement of threaded post (H) on mounting bracket (A). Once the ideal position of the threaded post (H) is determined, tighten up the hex nut (G) onto the threaded post (H) just beneath the mounting bracket (A) to secure the threaded post in place.

ASSEMBLING THE FIXTURE

There are 4 12-inch stems (I), and 1 6-inch stem (J) included for each fixture. Thread wires through center stem (M) then screw center stem (M) onto threaded post (N) on the fixture. Screw the decorative stem (O) into arm hub (S) above socket. Determine the correct number of stems needed for proper hanging height. To lengthen the fixture, add additional stems. To shorten the fixture, trim the wires to desired length. Leave at least 8 to 10 inches of wire in addition to the desired length and slide any excess stems off the fixture's wiring to discard. Keep in mind that you must use at least one stem to hang the fixture. Thread the wires through the stems and pull the wires until taut before connecting the stems together. All threads should be engaged but do not overtighten (some manual straightening of the stems may be required). Screw stem onto threaded post (L) of the center stem (M). Pull the fixture wires through the canopy loop ring (F), the top of canopy (D), and canopy loop (E). Screw the threaded post of the top stem to canopy loop (E). To install on a sloped ceiling, make sure that the notched side of hang straight (E) faces away from the peak of the ceiling (twist into place if needed). Have a helper support the fixture's weight and attach the mounting bracket (A) to the junction box by securely tightening the mounting screws (B). Once attached to the junction box, grasp the stems firmly with both hands and gently pull toward the notch until the fixture is at the desired angle.

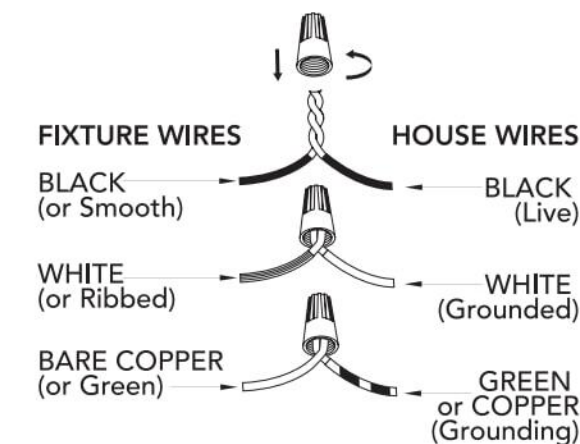

CONNECTING THE WIRES

Attach the fixture's wires to the power supply wires from the junction box. Connect black to black (live); white to white (neutral); grounding to grounding (green or copper). Twist the ends of the wire pairs together then twist on a wire connector. Make sure all twists are in the same direction. Loop fixture's ground wire around grounding screw (C) and tighten. If there is no ground wire (green or copper) from the junction box, contact a qualified electrician.

FINISHING THE INSTALLATION

Place the canopy (D) flush to the ceiling and slide the canopy loop ring (F) up beneath the canopy. Tightly screw canopy loop ring (F) onto the canopy loop (E) to properly secure the canopy (E) in place. Install light bulb (not included) in accordance with the fixture's specifications. Do not exceed the recommended wattage. Unscrew ring (P) from threads (T) and slide the hood (Q) up the stem to expose metal bracket (R). Angle glass (U) over metal bracket (R) one side at a time making sure glass (U) is level and resting on the lower notches of metal bracket (R). Then slide hood (Q) back down over the glass and tighten the ring (P) onto threads (T) to secure the hood (Q) and glass (U). Repeat for each socket. Remove the glass before maintenance. Your installation is now complete. Turn on the power and test the fixture.

CLEANING TIPS


Treat the fixture gently! Regular cleaning will reduce the need for deep cleaning. For regular cleaning, turn off the light and wipe down the fixture with a clean lint-free cotton or microfiber cloth. Never spray cleaner directly onto the fixture.



Hunter

Getty

For Models:
Para los Modelos:
Pour les Modèles:
13190

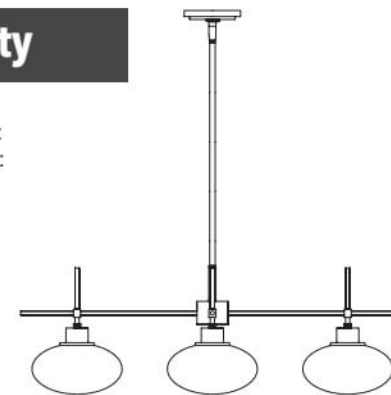


Here are the tools you'll need to complete your installation:
Estas son las herramientas que usted necesitará para completar su instalación:
Voici les outils dont vous aurez besoin pour réaliser l'installation:

Tools list in Spanish and French.




Ladder
Escalera
Échelle



Screwdriver
Destornillador
Tournevis



Pliers
Alicates
Pince



Wire Strippers
Pelacables
Pince à dénuder

4 Light Chandelier
4 Luz Lámpara Tipo Araña
4 Lumière Chandelier


Fixture weight ±2 lbs:
Peso ±2 lb: 9.79 lbs (4.44 kg)
Poids fixe ±2 lbs:

Hardware Service Kit/Kit De Mantenimiento Del Equipo/Trousse De Maintenance Quincaillerie

Part #/Pieza #/Pièce #	Model/Modelo/Modèle	Finish/Finish/Fin
KG22001A57	13190	Luxe Gold/Oro de Lujol/Or Grand Luxe

Glass/Domo De Vidrio/Verre

Part #/Pieza #/Pièce #	Model/Modelo/Modèle	Type/Tipo/Type
KG23900L57	13190	Cased White Glass/Pantalla de Vidrio Blanco/Verre Blanc

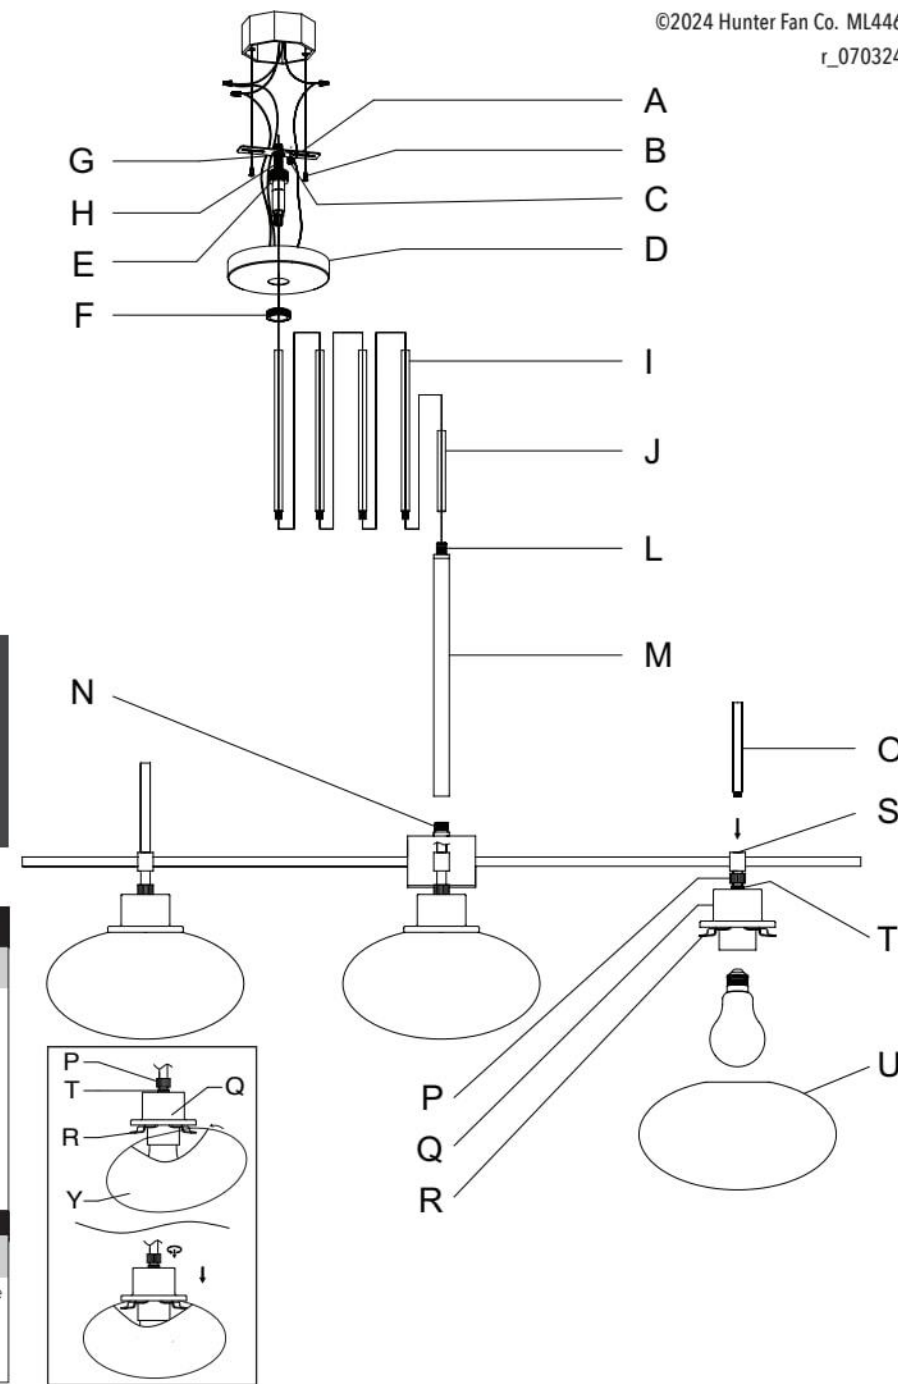

INSTALLATION INSTRUCTIONS INSTRUCCIONES DE INSTALACIÓN/ INSTRUCTIONS D'INSTALLATION



READ AND SAVE THESE INSTRUCTIONS
These instructions are provided for your safety. It is very important that they are read carefully and completely before beginning installation of the lighting fixture.



LEA Y GUARDE ESTAS INSTRUCCIONES
Estas instrucciones se proporcionan para su seguridad. Es muy importante leerlas detenidamente y completamente antes de comenzar la instalación de la lámpara.



LISEZ ET CONSERVEZ CES INSTRUCTIONS
Ces instructions sont fournies pour votre sécurité. Il est très important de les lire attentivement dans leur intégralité avant d'entreprendre l'installation du luminaire.